


PCI-1714 PCI-1714UL

30 MS/s Simultaneous 4-ch Analog Input Card

10 MS/s Simultaneous 4-ch Analog Input Card

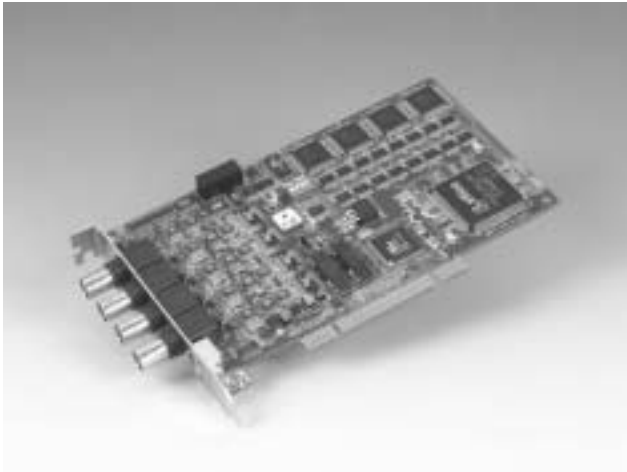

CE

Features

- 12-bit A/D converter up to 30 MS/s
- 4 single-ended analog input channels
- Programmable gain for each input channel
- 32,768 samples FIFO memory for each channel (8,192 for PCI-1714UL)
- 4 A/D converters simultaneously sampling
- Multiple A/D triggering modes
- Programmable pacer/counter
- BoardID™ switch

Introduction

PCI-1714 is an advanced high-performance data acquisition card based on the PCI bus. With a large FIFO of 32 K for each channel, the maximum sampling rate of PCI-1714 can get up to 30 MS/s, on each channel, with an emphasis on continuous, non-stop, high-speed, streaming data of samples to host memory. The low-cost PCI-1714UL offers 10MS/s on each channel at a stable rate, and has also been equipped with a universal PCI interface.

Specifications

Analog Input

- **Channels** 4 single-ended
- **Resolution** 12 bits
- **Max. Sampling Rate** 30 MS/s for PCI-1714
(Under 32,768 samples for ea. ch)
10 MS/s for PCI-1714UL
(Under 8,192 samples for ea. ch)
- **FIFO Size** PCI-1714: 32,768 samples for each channel
PCI-1714UL: 8,192 samples for each channel
- **Overvoltage Protection** 30 Vp-p
- **Input Impedance** 50 Ω / 1 MΩ / Hi Z jumper selectable / 100 pF
- **Sampling Modes** Software polling, pacer
- **Trigger Modes** Post-trigger, pre-trigger, delay-trigger, about-trigger
- **Input Range** (V, software programmable)

Bipolar	±5V	±2.5V	±1V	±0.5V
----------------	-----	-------	-----	-------


General

- **Bus Type** PCI-1714: PCI V2.2
PCI-1714UL: Universal PCI V2.2
- **I/O Connectors** 4 x BNC connector (for AI)
1 x PS/2 connector (for Ext. clock and trigger)
- **Dimensions** 175 x 100mm (6.9" x 3.9")
- **Power Consumption** Typical: +5 V @ 850 mA ; +12 V @ 600 mA
Max.: +5 V @ 1 A ; +12 V @ 700m A
- **Operating Temperature** 0 ~ 70° C (32~158° F)
- **Storage Temperature** -20 ~ 85° C (-4~185° F)
- **Storing Humidity** 5 ~ 95% RH, non-condensing (refer to IEC 68-2-3)
- **Certifications** CE

Ordering Information

- **PCI-1714** 30 MHz Simultaneous 4-ch Analog Input Card, user's manual and driver CD-ROM (PCL-10901-1 cable included)
- **PCI-1714UL** 10 MHz Simultaneous 4-ch Analog Input card
- **ADAM-3909** DB-9 Wiring Terminal for DIN-rail Mounting
- **PCL-10901-1** PS2 to DB9 Wiring Cable, 1m
- **PCL-10901-3** PS2 to DB9 Wiring Cable, 3m
- **PCL-1010B-1** BNC to BNC Wiring Cable, 1m

Pin Assignments

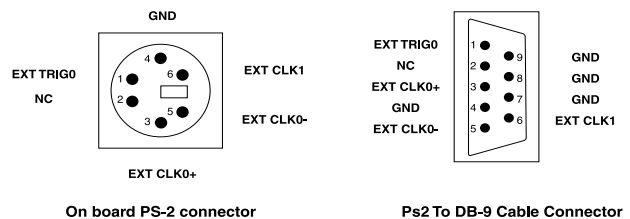

- 1 Software
- 2 IPCC
- 3 TPC
- 4 FPM
- 5 ATM & AWS
- 6 DA&C
- 7
- 8 cPCI
- 9 ADAM-3000
- 10 Motion Control
- 11 ICOM
- 12 Industrial Networking
- 13 UNO
- 14 ADAM-4000
- 15 ADAM-5000
- 16 ADAM-6000
- 17 BAS